

Graphics with PSTricks

Getting the points


Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

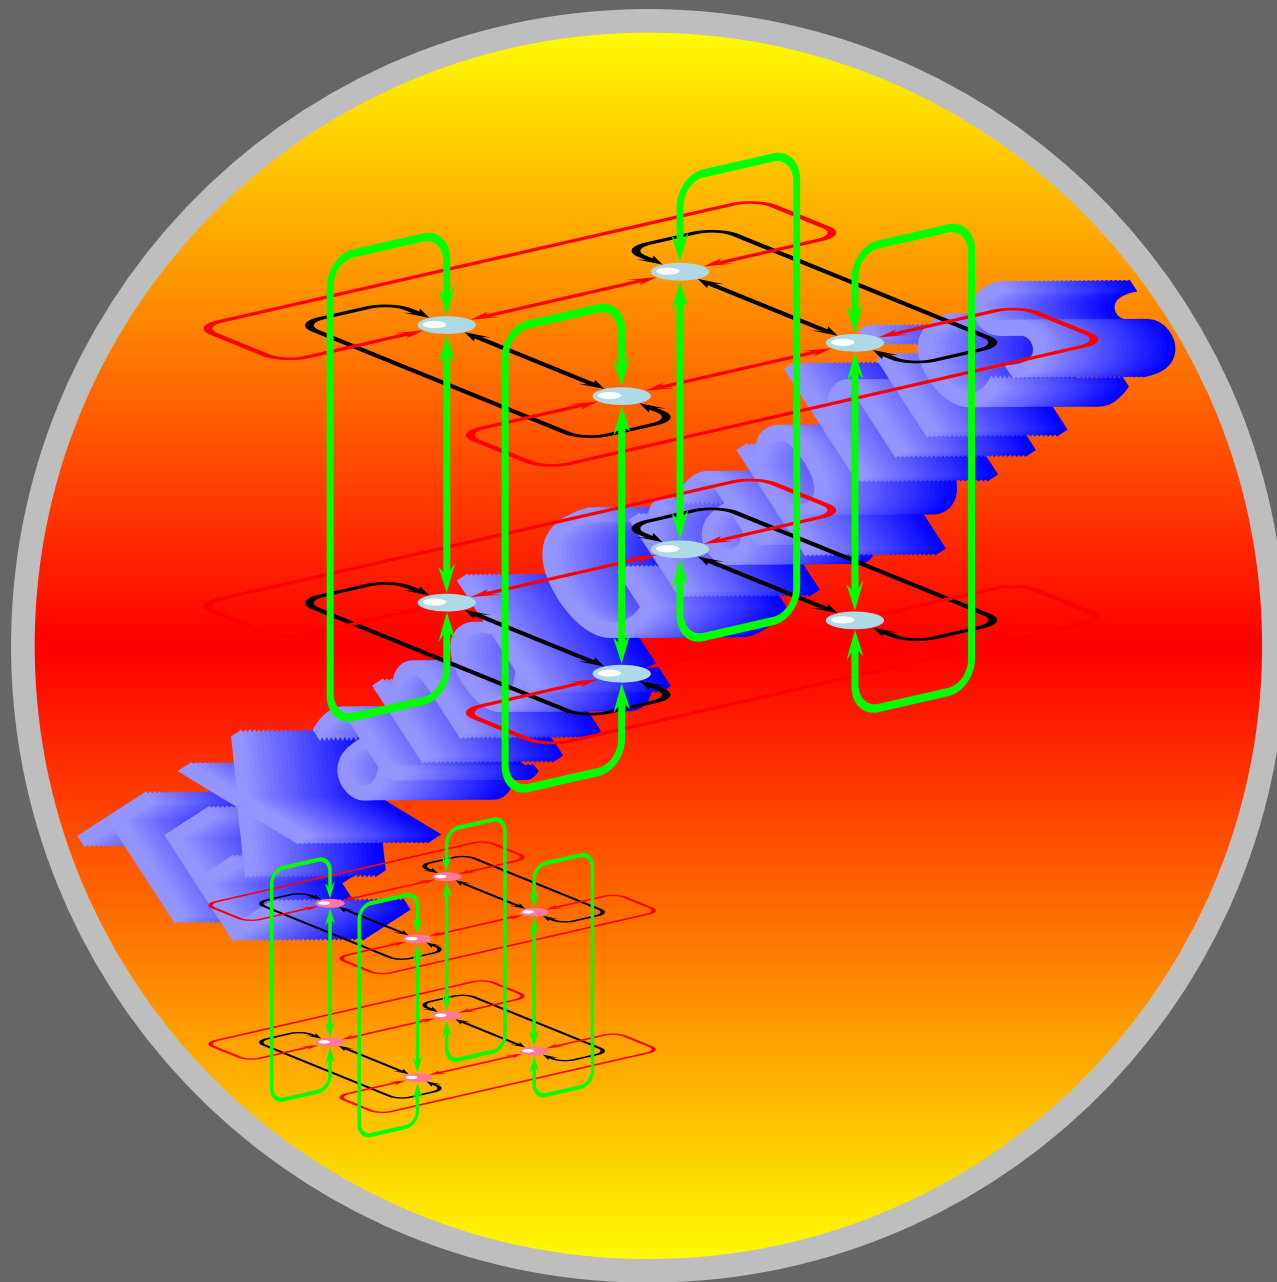

Online \LaTeX Tutorial Part II - Graphics

©2002, The Indian \TeX Users Group
This document is generated by PDF \TeX with
hyperref, pstricks, pdfticks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



1. Graphics with PSTricks

\LaTeX has only limited drawing capabilities, while PostScript is a page description language which has a rich set of drawing commands; and there are programs (such as `dvips`) which translate the `dvi` output to PostScript. So, the natural question is whether one can include PostScript code in a \TeX source file itself for programs such as `dvips` to process after the \TeX compilation? This is the idea behind the `PSTricks` package of Timothy van Zandt. The beauty of it is one need not know PostScript to use it—the necessary PostScript code can be generated by \TeX macros defined in the package.

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online \LaTeX Tutorial Part II - Graphics

©2002, The Indian \TeX Users Group
This document is generated by `PDF \TeX` with
`hyperref`, `pstricks`, `pdftricks` and `pdfscreen`
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



1.1. Getting the points

Any picture is drawn by stringing together appropriate points. How do we specify the points we need? We've a method of specifying each point in a plane using a pair of numbers, thanks to the 17th century French mathematicians Pierre de Fermat and René Descartes. The method is to fix a pair of perpendicular lines (called *axes*) and label each point with the numbers representing its distance from these two points (called *coordinates*) as shown in the figure below:

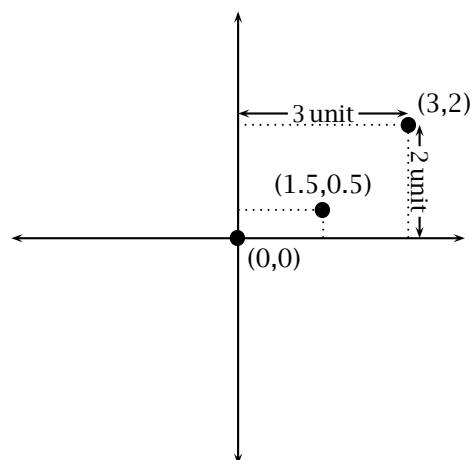

Note that the meeting point of the axes (called the *origin*) has coordinates $(0,0)$. In order to associate each pair of numbers with a *unique* point, we make the convention that horizontal distances to the left of the origin and vertical distances below the origin are *negative* as illustrated below:

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



Getting the points


Drawing Dots

Simple Lines


Ends of Lines

Bent Lines and Polygons

Simple Curves

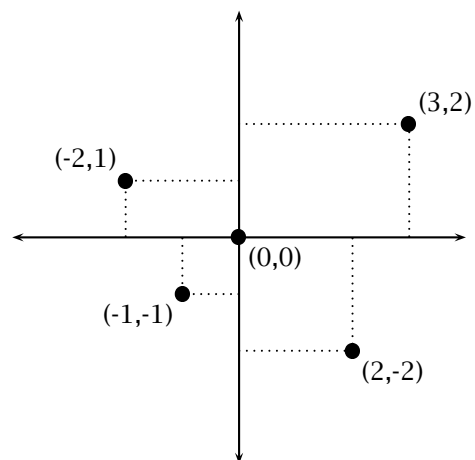

Another fact to note is that the coordinates of points depend on the position of the axes chosen, so that the same point has different pairs of coordinates with respect to different set of axes. This is illustrated in the figure below, where the point which originally had coordinates $(3,2)$ with respect to the axes shown in gray has new coordinates $(1,1)$ with respect to new axes shown in black.

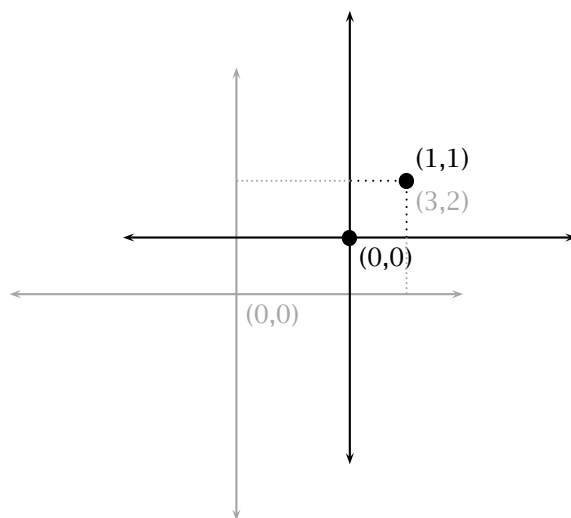

Online \LaTeX Tutorial Part II - Graphics

©2002, The Indian \TeX Users Group
This document is generated by \PDF\TeX with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



The PSTricks package uses coordinates to specify points to plot and then various other commands to join them.

Graphics with PSTricks

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online \LaTeX Tutorial Part II – Graphics

©2002, The Indian \TeX Users Group
This document is generated by PDF \TeX with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



1.2. Drawing Dots

Now let's see how to draw pictures with PSTricks. The basic package to use is `pstricks` and so we assume in all the codes given below that this package has been loaded with the command `\usepackage{pstricks}` in the document preamble.

Let's start with the simplest of graphical objects—a single dot. Type in the code below in your document:

```
Look at this dot \psdots(1,0)
```

and \TeX compile the document. To produce the PostScript, you'll have to use the `dvips` program or any other `dvi` to PostScript translator available in your system. With `dvips`, this done by the command


```
dvips filename -o
```

where *filename* is the name of your file *without any extension* (or with the extension `.dvi`). This creates a PostScript file of the same name but with the extension `.ps` which you can view using a PostScript previewer, such as `ghostview`. It looks like this:

Look at this dot ●

Some explanations are in order. Evidently the command to draw a dot is `\psdots` followed by the coordinates of the point where the dot is to be placed. But we know that the assignment of coordinates to points (and *vice versa*) makes sense only after fixing the axes. So when we specify coordinates such as `(0,1)` as above, what are the axes used? By default, PSTricks uses the current point in \TeX as the origin and horizontal and vertical lines through this point as the axes. Again, the default unit is 1 cm. Thus in the above example, a point is drawn 1 cm. away from the letter `t` in `dot`. This is

illustrated in the figure below, where the (invisible) axes are shown in gray.



A single `\psdots` command can be used to plot any number of points. For example, the input

```
Look at these dots \psdots(0,0)(2,0)(1,1)
```

produce the (PostScript) output
Look at these dots



Now suppose we try

```
Look at these dots \psdots(0,0)(2,0)(1,1) forming the vertices  
(corners) of a triangle.
```

the output produced is



What happened? Why were the dots overwritten? What happened actually is that $\text{T}_{\text{E}}\text{X}$ did not reserve any space for the picture (recall that the

Online $\text{L}_{\text{A}}\text{T}_{\text{E}}\text{X}$ Tutorial Part II - Graphics

©2002, The Indian $\text{T}_{\text{E}}\text{X}$ Users Group
This document is generated by $\text{P}_{\text{D}}\text{F}_{\text{T}}\text{E}_{\text{X}}$ with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian $\text{T}_{\text{E}}\text{X}$ Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



picture is drawn *after* the $\text{T}_{\text{E}}\text{X}$ compilation) and so the dots were drawn over the text. (if you look closely, you can see that the dots are over the letters). This brings up an important point to be kept in mind: *most of the PSTricks commands produce 0-dimensional boxes in $\text{T}_{\text{E}}\text{X}$* . So, we must ensure that $\text{T}_{\text{E}}\text{X}$ leaves enough space for the pictures to be drawn, by enclosing the picture in a $\text{T}_{\text{E}}\text{X}$ box of suitable size. PSTricks itself provides a convenient method of doing this, in the form of the `pspicture` environment. See how we can modify the previous example:


```
\begin{pspicture}(-0.5,0)(2.5,1)
  \psdots(0,0)(2,0)(1,1)
\end{pspicture}
```

This gives the output



Here the pairs $(-0.5,0)$ and $(2.5,1)$ are the coordinates of the bottom-left and top-right corners of a box which encloses the picture as shown in the figure below:

Look at these dots



forming the vertexes of a triangle.

In fact, the first pair of coordinates is optional and defaults to $(0,0)$. Thus for example,

...

Online $\text{L}^{\text{A}}\text{T}_{\text{E}}\text{X}$ Tutorial Part II - Graphics

©2002, The Indian $\text{T}_{\text{E}}\text{X}$ Users Group
This document is generated by $\text{PDF}_{\text{E}}\text{X}$ with
hyperref, pstricks, pdfticks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian $\text{T}_{\text{E}}\text{X}$ Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>





```
\begin{pspicture}(1,2)...\end{pspicture}
```

is equivalent to

```
\begin{pspicture}(0,0)(1,2) ... \end{pspicture}
```

We can also 'display' the picture by

```
\begin{pspicture}(-0.5,-0.5)(2.5,1.5)  
  \psdots(0,0)(2,0)(1,1)  
\end{pspicture}
```

This produces



Can you see why the *second* coordinate of the 'box' is changed to -0.5 and 1.5 from its values 0 and 1 in the previous example?

The dots we've been drawing so far are all circular and black. How about square and white dots? Change the input of the previous example as follows:

Look at these dots

```
\begin{center}  
  \begin{pspicture}(-0.5,-0.5)(2.5,1.5)  
    \psdots[dotstyle=square](0,0)(2,0)(1,1)  
  \end{pspicture}  
\end{center}
```

forming the vertices of a triangle.

Online L^AT_EX Tutorial Part II – Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



We then get the output shown below:
Look at these dots



forming the vertexes of a triangle.


Thus the shape of the dots is controlled by the parameter `dotstyle` and it's to be specified within square brackets after the `\psdots` command. The various possible values of this parameter and the corresponding shape of the dots is shown in the table below:

STYLE	EXAMPLE	STYLE	EXAMPLE
*	● ● ●	o	○ ○ ○
+	+ + +	x	× × ×
oplus	⊕ ⊕ ⊕	otimes	⊗ ⊗ ⊗
asterisk	* * *		
triangle	△ △ △	triangle*	▲ ▲ ▲
square	□ □ □	square*	■ ■ ■
diamond	◆ ◆ ◆	diamond*	◇ ◇ ◇
pentagon	◇ ◇ ◇	pentagon*	◆ ◆ ◆

Also, dots can be scaled using the parameter `dotscale` and rotated using the parameter `dotangle`. For example

```
\begin{pspicture}(-0.5,-0.5)(2.5,2.5)
\psdots[dotstyle=+,dotangle=45](0,0)
\psdots[dotstyle=+,dotscale=1.5,
dotangle=45](0.5,0.5)
\psdots[dotstyle=+,dotscale=2,
dotangle=45](1,1)
\psdots[dotstyle=+,dotscale=2.5,
dotangle=45](1.5,1.5)
\psdots[dotstyle=+,dotscale=3,
dotangle=45](2,2)
\end{pspicture}
```

gives



Instead of scaling, we can explicitly specify the size of dots. But this we'll discuss in the next section (with a reason, of course).

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



1.3. Simple Lines

Let's see how we draw lines next. The command is `\psline` with the coordinates of the points to be joined. For example

```
Look at the line segment below
\begin{center}
\begin{pspicture}(0,0)(3.5,2.5)
\psline(2,1)(3,2)
\end{pspicture}
\end{center}
equally slanted to the horizontal and the vertical.
```

gives

Look at the line segment below



equally slanted to the horizontal and the vertical.

We can draw dashed or dotted lines using the `linestyle` parameter.

Thus

```
\begin{pspicture}(0,0)(2,1)
\psline(0,0)(2,0)
\psline[linestyle=dashed](2,0)(1,1)
\psline[linestyle=dotted](1,1)(0,0)
\end{pspicture}
```

gives

Online L^AT_EX Tutorial Part II - Graphics


©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdfticks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>






In this and many of the pictures below, we include a “coordinate grid” for convenience of reference. It is not produced by the code given alongside.

In the dashed style, the length of the black and white segments is controlled by the parameter `dash`. Thus `dash=3pt 2pt` produces dashed line with black segments of length 3 pt. and white segments of length 2 pt. Thus

```
\begin{center}
\begin{pspicture}(-0.5,-0.5)(2.5,1.5)
\psline[linestyle=dashed,dash=2pt 2pt]
(0,0)(2,0)
\psline[linestyle=dashed,dash=2pt 5pt]
(2,0)(1,1)
\psline[linestyle=dashed,dash=5pt 5pt]
(1,1)(0,0)
\end{pspicture}
\end{center}
```

gives



The default value of `dash` is 5 pt 3 pt. Again, in the dotted style, the distance between dots is controlled by the parameter `dotsep` whose default value is 3 pt.

We can also alter the thickness of the lines by changing the value of the parameter `linewidth` which has a default value of 0.8 pt. Look at the example below:

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>




```

\begin{center}
\begin{pspicture}(0,-0.5)(2.5,4.5)
\psline[linewidth=0.2pt](0,0)(0,2)
\psline[linewidth=0.4pt](0.5,0)(0.5,2)
\psline[linewidth=0.6pt](1,0)(1,2)
\psline[linewidth=0.8pt](1.5,0)(1.5,2)
\psline[linewidth=1pt](2,0)(2,2)
\psline[linewidth=1.2pt](2.5,0)(2.5,2)
\psline[linewidth=1.4pt](3,0)(3,2)
\psline[linewidth=1.6pt](3.5,0)(3.5,2)
\psline[linewidth=1.8pt](4,0)(4,2)
\psline[linewidth=2pt](4.5,0)(4.5,2)
\end{pspicture}
\end{center}

```

produces

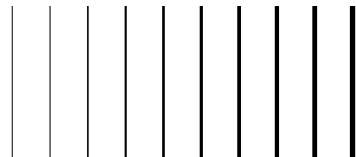

Graphics with PSTricks

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>




1.4. Ends of Lines

Lines can be provided with arrowheads. This is done by the `arrows` parameter

```
\begin{center}
\begin{pspicture}(0,-0.5)(2,2.5)
\psline[arrows=->](0,0)(1,2)
\psline[arrows=<->](1,1)(2,1)
\end{pspicture}
\end{center}
```

produces



Instead of arrowheads, lines can be made to terminate with circles, T-bars and so on, using the parameter `arrows`. The available values of this parameter and the corresponding line terminators are given in the Table 1.1. We can mix and match these terminators as values for the `arrows` parameter such as `*->` or `|-<<`.

Certain terminators are clearly seen only for thick lines. For example

```
\begin{pspicture}(-0.5,-0.5)(2.5,2.5)
\psline[linewidth=0.1cm,arrows=|-|]
(1,0)(1,2)
\psline[linewidth=0.1cm,arrows=|*-*]
(2,0)(2,2)
\end{pspicture}
```

gives

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



VALUE	EXAMPLE	NAME
-	—	none
<->	↔	arrowheads
>-<	↠	reverse arrowheads
<<->>	↔↔	double arrowheads
>>-<<	↠↠	double reverse arrowheads
-	┌──┐	T-bars, flush with end points
* - *	┌──┐	T-bars, centered on end points
[-]	┌──┐	square brackets
(-)	(──)	rounded brackets
o-o	○──○	circles, centered on end points
-	●──●	disks, centered on end points
-	●──●	disks, flush to endpoints
c-c	—	extended, rounded ends
cc-cc	—	flush round ends
C-C	—	extended, square ends

Table 1.1: Line terminators



To see some other terminators clearly, thicker lines are needed. Thus

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>




```
\begin{pspicture}(-0.5,-0.5)(3.5,2.5)
\psline[linewidth=0.5cm](0,0)(0,2)
\psline[linewidth=0.5cm,arrows=c-c]
(1,0)(1,2)
\psline[linewidth=0.5cm,arrows=cc-cc]
(2,0)(2,2)
\psline[linewidth=0.5cm,arrows=C-C]
(3,0)(3,2)
\end{pspicture}
```

gives



The arrows parameter can also be specified as an optional argument within *braces* after the other options (in square brackets). Thus instead of

```
\psline[linestyle=dotted,arrows=<->](0,0)(2,0)
```

we can also write

```
\psline[linestyle=dotted]{<->}(0,0)(2,0)
```

Now is the time to talk of (no, not cabbages and kings) the size of dots. The diameter of a circular dot is 2.5 times the current linewidth plus .5 pt. This can be changed by the parameter `dotsize`. Thus for example

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



```
\begin{center}
\begin{pspicture}(0,0)(2,2)
  \psdot[linewidth=0.1cm,dotsize=1cm 10](1,1)
\end{pspicture}
\end{center}
```

gives



which is a circular disk of diameters $10 \times 0.1 + 1 = 2$ centimeters. (We'll soon see better method of drawing such disks). The polygonal dots are sized to have the same area as circles. The `dotsize` is made to depend on `linewidth` since dots are often used in conjunction with lines as in arrows (and `showpoints` which we will discuss later). Note that the `dotsize` can be set to any absolute value independent of the `linewidth` by setting the second number of the `dotsize` parameter to 0.

There are parameters determining the dimensions of the other types of line terminators also, which are given in Table 1.2. In this, *width* refers to a dimension perpendicular to the line and *length* refers to a dimension in the direction of the line.

The example below illustrates the use of some of these parameters

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



PARAMETER	VALUE	DESCRIPTION	DEFAULT VALUE
<code>dotsize = dim num</code>	$num \times linewidth + dim$	the diameter of a circle or disc	0.5 pt 5
<code>tbar size = dim num</code>	$num \times linewidth + dim$	the <i>width</i> of a T-bar, square bracket or round bracket	2 pt 5
<code>bracketlength = num</code>	$number \times width$	the <i>length</i> of a square bracket	0.15
<code>rbracketlength = num</code>	$number \times width$	the <i>length</i> of a round bracket	0.15

Table 1.2: Parameters for line terminators

```

\begin{center}
\begin{pspicture}(-1,-1)(9,4)
\psline[tbar size=1cm 0,bracketlength=0.5]{[-|}(0,0)(3,0)
\psline[tbar size=1cm 0]{[-|}(0,3)(3,3)
\psline[tbar size=1cm 0,rbracketlength=0.5]{(-|}(5,0)(8,0)
\psline[tbar size=1cm 0]{(-|}(5,3)(8,3)
\end{pspicture}
\end{center}

```

which produces the output below.

Online L^AT_EX Tutorial Part II - Graphics


©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA


<http://www.tug.org.in>



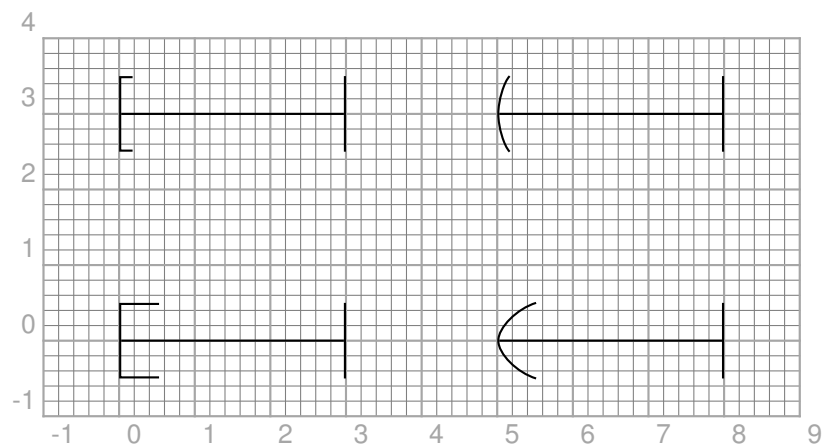

Note that the coordinate grid in the picture above is not produced by the given code.

The shape of arrowheads is determined by its *length*, *width* and *inset* and the parameters controlling them are `arrowsize`, `arrowlength` and `arrowinset` as shown in the figure below:

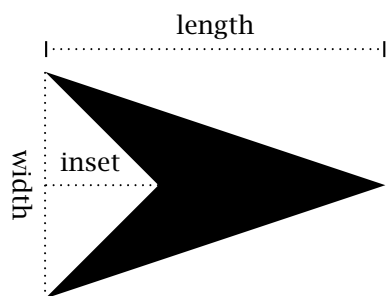

$$\begin{aligned} \text{arrowsize} &= \text{dim num} \\ \text{width} &= \text{num} \times \text{linewidth} + \text{dim} \\ \text{length} &= \text{arrowlength} \times \text{width} \\ \text{inset} &= \text{arrowinset} \times \text{length} \end{aligned}$$

Online \LaTeX Tutorial Part II - Graphics

©2002, The Indian \TeX Users Group
This document is generated by \PDF\TeX with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>




The default values of the parameters are

```
arrowsize = 2pt 3  arrowlength = 1.4  arrowinset = 0.4
```

The example below illustrates the effect of changing these parameters.

```
\begin{center}
\begin{pspicture}(0.5,0.5)(5.5,4.5)
\psline[linewidth=2pt,
        arrowsize=2pt 2,
        arrowlength=5,
        arrowinset=0.1]
        {->}(1,1)(4,4)
\psline[linewidth=2pt]
        {->}(2,1)(5,4)
\end{pspicture}
\end{center}
```



We can also draw “double lines” by setting the parameter `doubleline` to `true` (by default, it's `false`). For example

```
\begin{center}
\begin{pspicture}(-0.5,-0.5)(2.5,2.5)
\psline[linewidth=0.06,
        doubleline=true,
        doublesep=0.05,
        (0,0)(2,2)
\end{pspicture}
\end{center}
```

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



gives



Graphics with PSTricks

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online \LaTeX Tutorial Part II – Graphics

©2002, The Indian \TeX Users Group
This document is generated by $\text{PDF}\TeX$ with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>




1.5. Bent Lines and Polygons

As in the case of `\psdots` we can draw multiple lines with a single `\psline` command. For example,

```
\begin{center}
\begin{pspicture}(0,0)(5,2)
\psline(1,1)(2,2)(3,1)(4,2)(5,1)
\end{pspicture}
\end{center}
```

gives



Note that the coordinate grid is not produced by the code given alongside.

The corners in the above picture can be rounded by giving a positive value to the `linearc` parameter which has default value 0pt. It is actually the radius of the arc drawn at the corners. Thus

```
\begin{center}
\begin{pspicture}(0,0)(5,2)
\psline[linearc=0.25]%(1,1)(2,2)(3,1)(4,2)(5,1)
\end{pspicture}
\end{center}
```

gives

Online L^AT_EX Tutorial Part II - Graphics


©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>






Now change the value of `lineararc` to 0.5 in the above code and see what happens.

Polygons can be drawn with `\psline` by taking the first and the last points same. For example

```
\begin{center}
\begin{pspicture}(0,0)(5,3)
\psline(1,1)(2,2)(5,2)(4,1)(1,1)
\end{pspicture}
\end{center}
```

gives



We can also use the command `\pspolygon` to draw polygons. Here, we need not repeat the starting point as in `\psline`. Thus in the last example above, the parallelogram could also be drawn by the command

```
\pspolygon(1,1)(2,2)(5,2)(4,1)
```

instead of the command

```
\psline(1,1)(2,2)(5,2)(4,1)(1,1)
```

The `\pspolygon` command also has a “starred” version which draws a

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdfticks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



“filled up” polygon. For example

```
\begin{center}
\begin{pspicture}(0,0)(5,3)
\pspolygon*(1,1)(2,2)(5,2)(4,1)
\end{pspicture}
\end{center}
```


gives



For drawing rectangles, there’s a simpler command `\psframe` in which we need only specify the bottom-left and top-right coordinates. There’s also a `\psframe*` command for a filled-up version. For example,

```
\begin{center}
\begin{pspicture}(0,0)(6,4)
\psframe(1,1)(3,3)
\psframe*(1,1)(2,2)
\psframe*(2,2)(3,3)
\end{pspicture}
\end{center}
```

gives



The corners of a frame can also be rounded. The parameter to set is `framearc`. If we set `framearc=number`, then the radius of the rounded corners is half the *number* times the width or height of the frame, whichever

Online L^AT_EX Tutorial Part II – Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA


<http://www.tug.org.in>



is less. Thus

```
\begin{center}
\begin{pspicture}(-0.5,0.5)(5.5,3.5)
\psframe[framearc=0.5](0,0)(5,3)
\psframe[framearc=0.5](1,1)(4,2)
\end{pspicture}
\end{center}
```

gives



Note that the corners of the larger rectangle are more rounded, as should be obvious from the definition of the `framearc` parameter. The radius of the corners can be made the same by setting the parameter `cornersize` to `absolute` (its default setting is `relative`) and then setting the radius using the `linearc` parameter as in the example below:

```
\begin{center}
\begin{pspicture}(-0.5,-0.5)(5.5,3.5)
\psframe[cornersize=absolute,%
linearc=0.5](0,0)(5,3)
\psframe[cornersize=absolute,%
linearc=0.5](1,1)(4,2)
\end{pspicture}
\end{center}
```

Online L^AT_EX Tutorial Part II - Graphics


©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdfticks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>





There are also commands to draw isosceles triangles (that is, triangles in which two sides are equal) and rhombuses (diamonds). The command

```
\pstriangle((x,y)(b,h))
```


draws an isosceles triangle with its base horizontal, the mid-point of its base at (x, y) , length of base b and height h while the command

```
\psdiamond((x,y)(d1,d2))
```

draws a rhombus with its diagonals along the horizontal and the vertical, which meet (x, y) and have lengths $2d_1$ and $2d_2$. Thus

```
\begin{center}
\begin{pspicture}(0,0)(5,5)
\pstriangle(1,0)(2,3)
\pstriangle*(4,1)(2,1.732)
\psdiamond(3,4)(2,1)
\end{pspicture}
\end{center}
```

gives

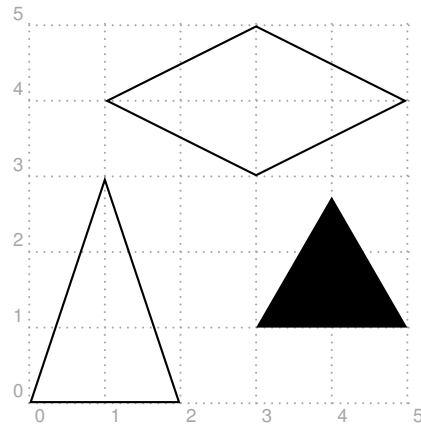

So far we've been drawing only straight lines (except for smoothing some corners). We'll discuss curves in the next few sections.

Graphics with PSTricks

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online \LaTeX Tutorial Part II - Graphics

©2002, The Indian \TeX Users Group
This document is generated by \PDF\TeX with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



1.6. Simple Curves

Circles, ellipses, circular arcs and so on can be easily drawn in PSTricks, using preset commands. Let's start with circles. The command is `\pscircle` (what else?) and we've to specify the coordinates of the center and the length of the radius. Recall that the default unit is centimeter, so that to produce a circle of radius 0.5 cm centered at (2,1), we write

```
\pscircle(2,1){0.5}
```

Since a circle is only a curved "line", various line parameters discussed earlier can also be used. There is also a starred version `\pscircle*` which gives a "solid" circle. See the example below:

```
\begin{center}
\begin{pspicture}(-1,-1)(3,8)
\pscircle*(1,0.25){0.25}
\pscircle[linewidth=0.33]%
(1,1){0.5}
\pscircle[linewidth=0.25]%
(1,2.25){0.75}
\pscircle(1,4){1}
\pscircle[linestyle=dotted]%
(1,6.25){1.25}
\end{pspicture}
\end{center}
```

Online L^AT_EX Tutorial Part II - Graphics


©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>





Pieces of circles can also be easily drawn. For example, the command `\psarc` draws a circular arc of specified center and radius from a given *angle* to another going *counterclockwise*. Note that the angles are measured from the horizontal. In the example below, we show the radii and the angles in gray along with the grid. (note that these are not produced by the given code).

```
\begin{center}
\begin{pspicture}(-1,-1)(3,3)
\psarc(0,0){3}{30}{60}
\end{pspicture}
\end{center}
```

Graphics with PSTricks

Getting the points

Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons

Simple Curves

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



Getting the points


Drawing Dots

Simple Lines

Ends of Lines

Bent Lines and Polygons


Simple Curves

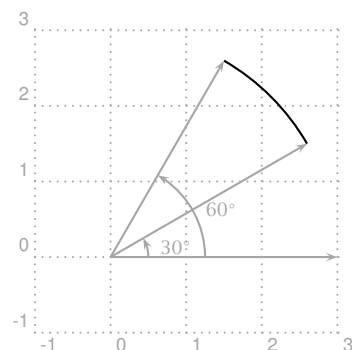

There's also a starred version `\psarc*` which draws a solid "segment" of a circle. For example,

```
\begin{center}
\begin{pspicture}(-2,-2)(2,2)
\psframe(-1,-1)(1,1)
\psarc*(-1,-1){1}{0}{90}
\psarc*(1,-1){1}{90}{180}
\psarc*(1,1){1}{180}{270}
\psarc*(-1,1){1}{270}{360}
\end{pspicture}
\end{center}
```

gives

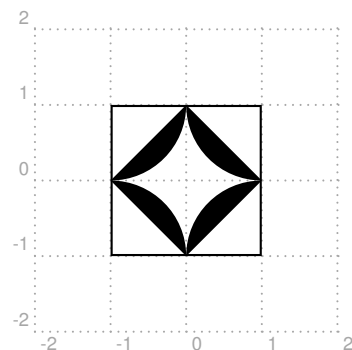

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL




The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>



While making a picture containing circular arcs, it may sometimes be convenient to “see” the center and radii. If the parameter `showpoints` is set to `true` (its default value is `false`), then the command `\psarc` (or `\psarc`) draws dashed lines from the center to the extremities of the arc. (This setting can be used with other commands also, where it will draw appropriate control points or lines). See the example below:

```
\begin{center}
\begin{pspicture}(0,0)(3,3)
\psarc[showpoints=true]%
(1,1){2}{30}{60}
\end{pspicture}
\end{center}
```



If we want to draw an arc with its bounding radii, we can use the `\pswedge` command. The starred version `\pswedge*` draws a solid sector as shown in the example below:

```
\begin{center}
\begin{pspicture}(-1.5,-1.5)(1.5,1.5)
\pswedge(0,0){1}{90}{360}
\pswedge*(0.1,0.1){1}{0}{90}
\end{pspicture}
\end{center}
```

Online L^AT_EX Tutorial Part II – Graphics


©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA


<http://www.tug.org.in>





The line terminators discussed earlier can be used with arcs also. If we want to show the angle between two (thick) intersecting lines using an arc with an arrowhead, we'd like to have the tip of the arrow *just* touch the line. For this, we can use the parameters `arcsepA` and `arcsepB`. If we set `arcsepA=dim`, then the first angle in the `\psarc` command would be adjusted so that the arc would just touch a line of width `dim` from the center of the arc in the direction of this angle. The parameter `arcsepB` makes a similar adjustment in the second angle. The parameter `arcsep` adjusts both the angles. The example below illustrates this.

```
\begin{center}
\begin{pspicture}(-2,0)(2,2)
\psline[linewidth=2pt]%
(2,2)(0,0)(-2,2)
\psarc[arcsepB=2pt]{->}%
(0,0){1}{45}{135}
\end{pspicture}
\end{center}
```



To see the difference, try the same code without the setting of `arcsepB`. An ellipse is a sort of a stretched circle and can be drawn much the

Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA


<http://www.tug.org.in>



same way as `s circle`. The command is `\psellipse` and we have to specify the center and half the width and height (technically, the “semi-major” and “semi-minor” axes). Thus to draw an ellipse centered at (1,1) with width 4 cm and height 2 cm, we type


```
\begin{center}
\begin{pspicture}(-1,0)(3,2)
\psellipse(1,1)(2,1)
\end{pspicture}
\end{center}
```

which gives



There's also a `\psellipse*` which, as you've probably guessed, draws a solid black ellipse.

```
\begin{center}
\begin{pspicture}(-2,-1)(2,1)
\psellipse(0,0)(2,1)
\psellipse*(0,0)(0.5,1)
\end{pspicture}
\end{center}
```



Online L^AT_EX Tutorial Part II - Graphics

©2002, The Indian T_EX Users Group
This document is generated by PDF_TE_X with
hyperref, psticks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian T_EX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA


<http://www.tug.org.in>



Another curve for which a preset command is available is a parabola (the path of a stone thrown at an angle, for example). It is drawn by the command `\parabola` (surprise!). We must specify the starting point and the maximum or minimum. As usual, we have a `\parabola*` also. Thus

```
\begin{center}
\begin{pspicture}(0,0)(4,2)
\parabola(0,0)(2,2)
\parabola*(1,1.5)(2,0)
\end{pspicture}
\end{center}
```

gives



Online \LaTeX Tutorial Part II - Graphics

©2002, The Indian \TeX Users Group
This document is generated by \PDF\TeX with
hyperref, pstricks, pdftricks and pdfscreen
packages in an intel PC running GNU/LINUX
and is released under LPPL



The Indian \TeX Users Group
Floor III, SJP Buildings, Cotton Hills
Trivandrum 695014, INDIA

<http://www.tug.org.in>

